


Regolo 240



Wall Lights | 220-240 V | topLED 24 W 600 mA | CRI 80
9040



Technical data	
Type	Wall Lights
Installation position	Wall lights
Installation environment	Indoor
Light Source	LED
Circuit structure	topLED
Optics	General Lighting
Light emission direction	upward
Power	24 W
Source lumens	2700 lm
Frequency	60 - 50 Hz
CCT / Tone	3000 K
Colour rendering index	80 Ra
AC / DC	AC
Safety class	1
IP	IP40
Glow wire test	850°
Direct mounting on normally flammable surfaces	No
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Single emission
Electrostatic discharge protection	No
Surge protection	No

Finishing casing	
Material	Aluminium
Colour	embossed white RAL 9003
Processing	Coating

Finishing diffuser	
Material	UV Resistant Polycarbonate
Colour	opaline
Processing	Sandblasting

Finishing mounting frame	
Material	Iron
Colour	zinc
Processing	Washing

Wall Lights | 220-240 V | topLED 24 W 600 mA | CRI 80
9040


Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topped LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 2700 lm, with a 112.5 lm/W nominal luminous efficacy.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of uv resistant polycarbonate with a sandblasting treatment; the mounting frame is made of iron, with a zinc finish, processed by means of washing. The ingress protection degree is IP40;

The total absorbed power is 24 W.

The device features protection class I and can be wall lights-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

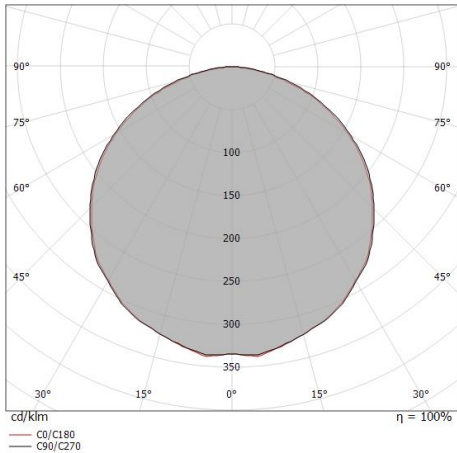

Distance [m]	Cone diameter [m]	illuminance [lx]
0.5	1.63 1.58	E(0°) 2713 E(C90) 197 E(C0) 212
1.0	3.25 3.15	E(0°) 678 E(C90) 49 E(C0) 53
1.5	4.88 4.73	E(0°) 301 E(C90) 22 E(C0) 24
2.0	6.50 6.30	E(0°) 170 E(C90) 12 E(C0) 13
2.5	8.13 7.88	E(0°) 109 E(C90) 8 E(C0) 8
3.0	9.75 9.45	E(0°) 75 E(C90) 5 E(C0) 6

— C0/C180 (Half-peak divergence: 115.2°)
- - C90/C270 (Half-peak divergence: 116.8°)

Illuminotechnical Features	
Light Output Ratio (LOR)	75 %
Source lumens	2700 lm
Delivered lumens	2030 lm
Consumption	24 W
Luminaire efficacy	84 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	20
LED Life / Failure Ratio	
L70 B20 C0 72.5h	

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	> 28
UGR axial	> 28

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	115°