



Pendant Luminaires | topLED 8 W 350 mA | CRI 80
15113



Technical data	
Type	Surface
Installation position	Ceiling
Installation environment	Outdoor
Light Source	LED
Circuit structure	topLED
Optics	General Lighting
Light emission direction	downward
Power	8 W
Source lumens	1002 lm
Current intensity	350mA
CCT / Tone	3000 K
Colour rendering index	80 Ra
C.C. / C.V.	CC
Safety class	3
IP	IP65
IK	IK10
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	1.306 Kg
Electrostatic discharge protection	No
Surge protection	No

Finishing diffuser	
Material	PE
Colour	neutral

Finishing mounting frame	
Material	PE
Colour	white

Pendant Luminaires | topLED 8 W 350 mA | CRI 80
15113


Double emission pendant luminaires for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 1 topLEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1002 lm, with a 125.3 lm/W nominal luminous efficacy.

The diffuser is made of pe; the mounting frame is made of pe, with a white finish. The ingress protection degree is IP65; the total weight is of 1.306 kg. The power supply driver is not provided and is to be ordered separately.

The total absorbed power is 8 W.

The device features protection class III and can be ceiling-mounted.

Compliant with the EN 60598-1 standard and its specific provisions.

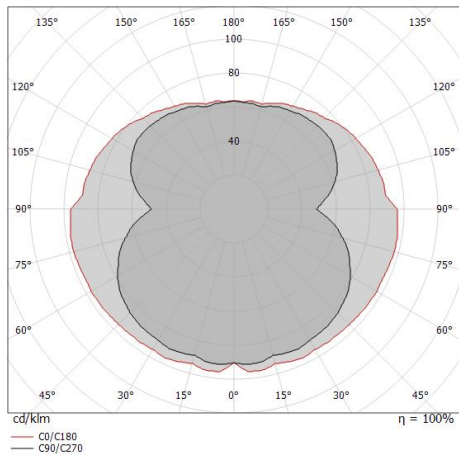


Illuminotechnical Features	
Light Output Ratio (LOR)	84 %
Source lumens	1002 lm
Delivered lumens	845 lm
Consumption	8 W
Luminaire efficacy	105 lm/W
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra
Junction temperature (lighting fixture)	80
Standard Operating Ambient Temperature	25

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 19
UGR axial	< 16

OPTICAL	
Light distribution simmetry	Symmetrical
C0/C180 optics	180°



Oh!_P65 | Pendant Luminaires | Accessories
15113



Power supply

Code
KIT0066